


Product leaflet

FM fan

High efficiency fan for the FM filter range

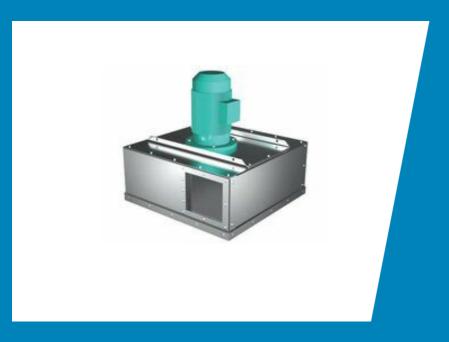

FM fan

The FM fan range is designed exclusively for direct mounting to the clean air chamber of the FM filter units.

The FM fans are designed for high efficiency with low noise levels and are of the non-over-loading type. This gives a safe and reliable system with minimal power consumption when under reduced loads. The fans are only available in RD version.

FM fan

Installation	Indoor, Outdoor
Material	Galv. steel, 2 mm (FM1000 = 4 mm)
Frequency (Hz)	50
No of phases	3

Models

ltem no	Power voltage (V)	Noise level (dB(A))	Weight (kg)	Power (kW)
5501498	230/400	65	74	3
5501537	400/690	69	83	4
5501538	230/400	69	83	4
5501576	230/400	67	95	5,5
5501575	400/690	67	95	5,5
5501612	400/690	72	150	7,5
5501659	400/690	73	166	11
5501660	230/400	73	166	11
5501699	400/690	74	180	15
5501700	230/400	74	180	15
5501741	400/690	76	260	18,5
5501742	230/400	76	260	18,5

Accessories

	Accessory	ltem no
	DUAL silencer for FM600 series fan with air grille	5501813
	DUAL silencer for FM6800 series fan with air grille	5501830
	DUAL silencer for FM1000 series fan with air grille	5501854
	DUAL silencer for FM600 series fan with air grille and rain cover	5501814
	DUAL silencer for FM6800 series fan with air grille and rain cover	5501832
G.	DUAL silencer for FM1000 series fan with air grille and rain cover	5501855
	DUAL silencer for FM600 series fan with flanged outlet for duct connection	5501815
	DUAL silencer for FM6800 series fan with flanged outlet for duct connection	5501833
	DUAL silencer for FM1000 series fan with flanged outlet for duct connection	5501856
	Noise enclosure for FM600 fan	5501783
	Noise enclosure for FM800 fan	5501784
	Noise enclosure for FM1000 fan	5501799

Nederman

