

Magna Track HS

Exhaust extraction system for emergency stations with high frequency /high speed runs



Magna Track HS

- ✓ Capacity: 1 vehicle per system
- ✓ Exhaust pipes: High level or Low level tail pipes
- ✓ High exit speed: up to 25 km/h; 15 mp
- ✓ For reverse-in (or drive-through)
- ✓ Optional automatic start/stop device that offers: - Practical control of fan start/stop - Safe control of air quality (source ventilation automatically starts when vehicle engine starts) - Simple programming - Approval for radio equipment acc. to EC directives, FCC (USA) and IC (Canada)

The MagnaTrack HS is designed to serve emergency stations with a high frequency of runs. The track system serves one vehicle at a time. The balancer has a constant lifting power. MagnaTrack HS is available in lengths from 3.5 m to 18 m; (10 ft to 60 ft) and it fits vehicles with low as well as high mounted exhaust pipes.

Magna Track HS

[ProductCertifications]	[ce]
-------------------------	------

Models

	Item no	Diameter, hose (mm)
	20804164 ^[1]	160
	20804264 ^[1]	160
	20804364 ^[1]	160
	20804464 ^[1]	160
	20804564 ^[1]	160
	20804664 ^[1]	160
	20806864 ^[1]	160
	20801564 ^[2]	130
	20801664 ^[2]	130
	20801764 ^[2]	160
	20801864 ^[2]	160
	20801964	160

^[1] Including - Guide Track (1), Mounting brackets for 2.4 m distance (2), Shock absorber (3), Horizontal hose (4), Transformer (12)


^[2] Including - Trolley (5), Balancer (6), Vertical hose (7), Electro-magnet assembly (9), Anchor plate (10), Disconnection box (11)

Accessories



	Accessory	Item no
	MagnaSystem Nozzle STD	20802164
	MagnaSystem Nozzle HB 600	20802264
	MagnaSystem Nozzle HB 600	20802364
	MagnaSystem Nozzle HB 900	20802464
	Scoop Nozzle HB 600 5" Magna system	20814263
	Scoop Nozzle HB 6" 600 Magna system	20814463
	Radio transmitter vehicle GHz	20376723
	Radio Receiver GHz	20376724
	Handheld radio transmitter GHz	20376725
	Program kit for radio system	20376726
	Hose protection ø130/160 (Pair)	20374428
	Anchor plate, shutter, in 3 parts	20371868
	Twist support, HL nozzle	20374364

Accessories

	Accessory	Item no
	Lengthening shaft, HL nozzle	20374359

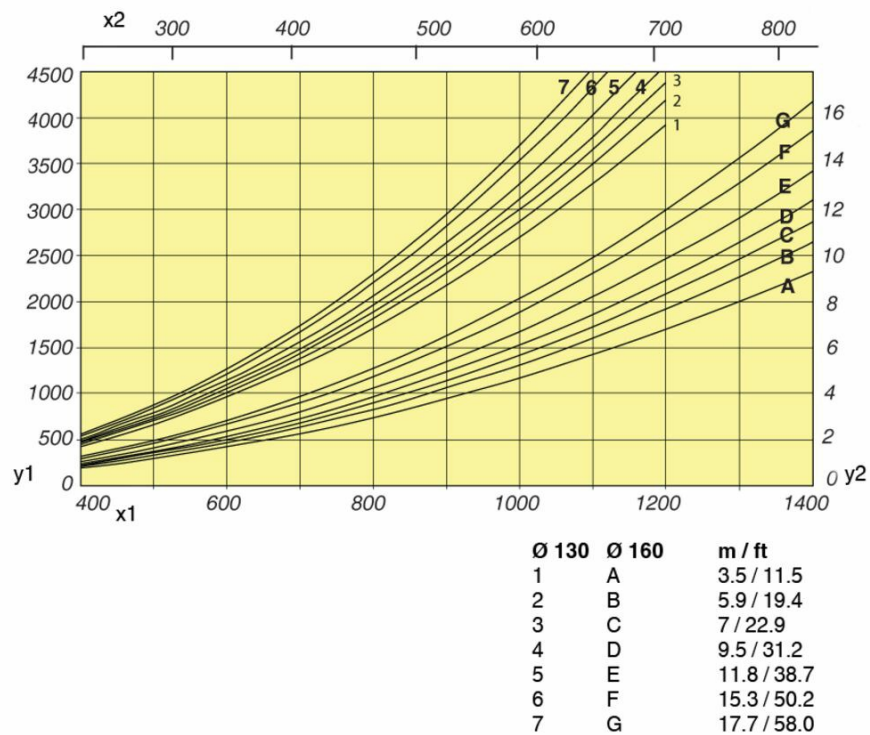

y1: Pa, x1: m³/h, x2: CFM y2: W.C

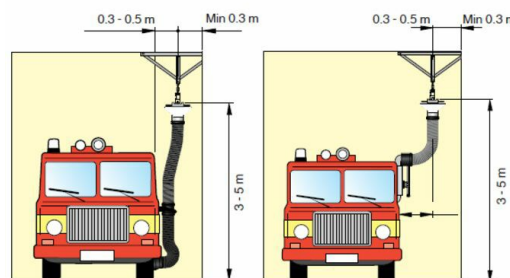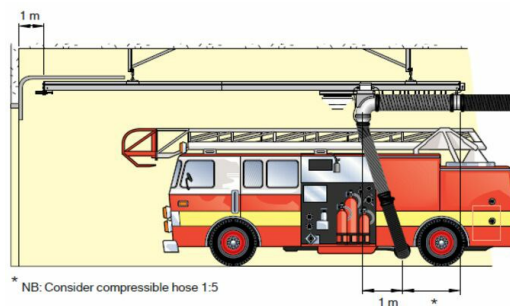

Lenght of rail, m	No. of brackets
3.5	2
5.9	3
7	4
9.5	4
11.8	5
15.3	7
17.7	9

N.B. The nozzle for high level (HL) exhaust pipes must be installed at a higher level than the exhaust pipe. The nozzle must be pulled downwards at connection, which will activate the balancer.

