

Producto leaflet

VAC 20

Low operating costs, efficient and reliable.



VAC 20

- ✓ Reliable
- ✓ Easy to install
- ✓ Low noise level
- ✓ Low operating cost

A VAC unit is the right choice for high vacuum extraction of welding fumes, dust from sanding and grinding operations and general clean up applications. VAC systems, a cost effective solution for better working environment, is based on a powerful vacuum unit, a modular design dust collector and a modern control unit/starter. A VAC unit is the perfect extraction source when a large number of working stations require dust extraction and when you need a flexible solution matching an expanding production. VAC units are available in several sizes. many extraction points can be in operation at the same time, served by one single unit. If you need more extraction points, any capacity can be achieved by parallel connection of two or more units. VAC units are protected from overload by a flow restrictor. VAC units are designed for use in modern systems with automatic vacuum valves. This means that the air flow can vary rapidly from max flow to zero. The power consumption adapts to the present need. The VAC unit comes to a complete stop when not used, thanks to the automatic start/stop function (option).

VAC 20

Certificaciones	[ce]
[ProductStandards]	Designed for ISO 21904 compliance
Instalación	Exterior, Interior
[ProductApplication]	Polvo, Granulado, Grano, Humos, Virutas
Frecuencia (Hz)	60
Número de fases	3



Modelos

	No. De Artículo	Tensión de alimentación (V)	[ItemMaxVaccum]	Potencia (kW)	Peso (kg)
	40103152 ^[1]	230	13,3	22	
	40103162	460	20,1	22	546
	40103172	575	20,1	22	546
	40103272 ^[1]	230	21,5	30	614
	40103282	460	21,5	30	614
	40103292 ^[1]	575	21,5	30	
	40103392 ^[1]	230	21,5	37	635
	40103402	460	21,5	37	635
	40103412 ^[1]	575	21,5	37	635
	40103512	230	22	45	786
	40103522 ^[1]	460	22	45	
	40103532 ^[1]	575	22	45	786

^[1] Motor type - Premium

Accessories

	Accesorio	No. De Artículo
	Silencer HT inlet D=200	40097080
	Silencer LT200	40139100
	Codo spiro BU 200mm 90dgr	40132540
	Jetcap D=200	40097090
	Jetcap D=250	40098000
	Silenciador de descarga modelo LT100 de 100 mm (3.94 pulgadas) para reducir el ruido del sistema de escape y mantener al mismo tiempo un flujo de aire eficaz.	40139081
	Silencer LT160	40139090
	Switch disconnecter MS6-KG80	40122320
	Switch disconnecter MS6-KG100	40122330

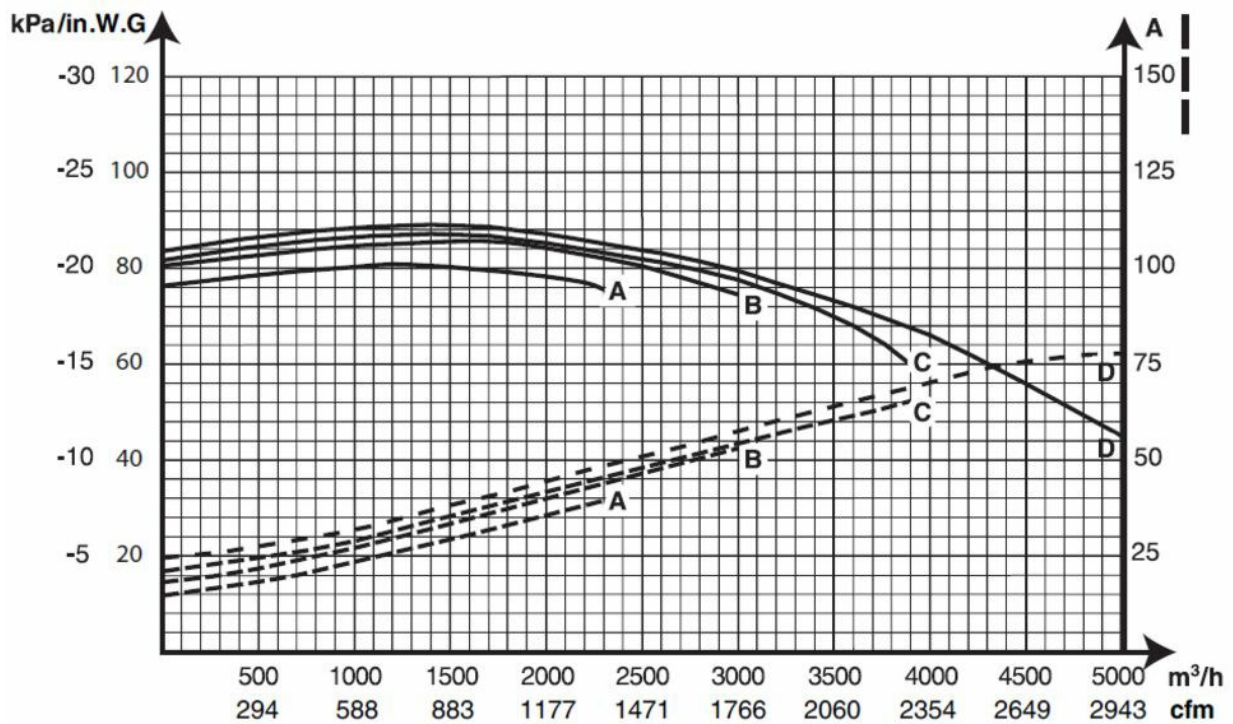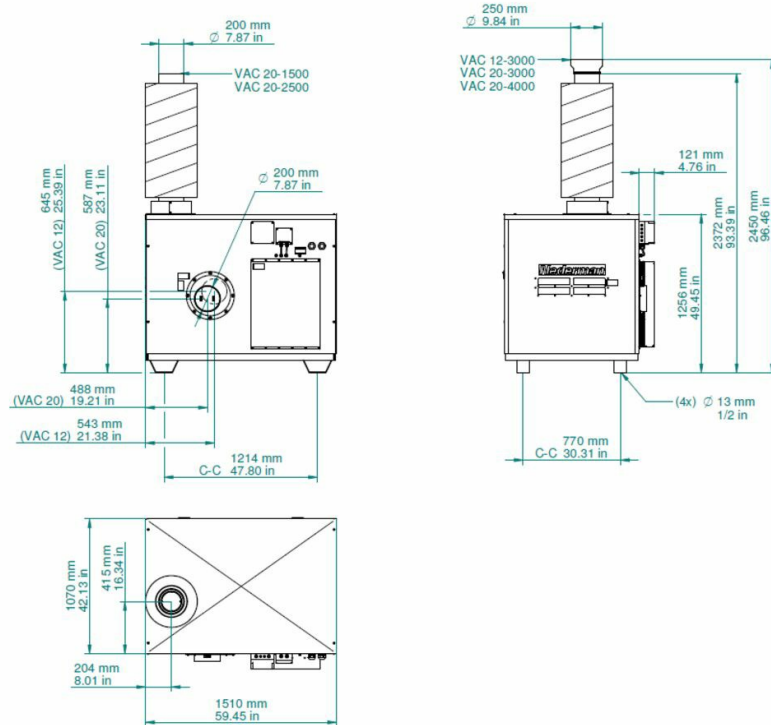

A: VAC20-1500, B: VAC20-2500, C: VAC20-3000, D: VAC20-4000