

Producto leaflet

Exhaust Hose NFC-6.5

Extreme high temperature hose



Exhaust Hose NFC-6.5

- ✓ Asbestos- and silicon-free high-temperature fabric.
- ✓ Temperature range: Continuous use: +650 °C. Short-term use: +750 °C.

Specifically designed to be flexible and ductile, and to have a very low pressure drop. They are resistant to all chemicals in diesel and petrol exhaust fumes, and show high resistance to mechanical stress.

Exhaust Hose NFC-6.5

Certificaciones	[ce]
-----------------	------

Modelos


	No. De Artículo
	89160045
	89160038
	89160039
	89160040
	89160041
	89160042
	89160043

Accessories

	Accesorio	No. De Artículo
	Hose coupling 150 (6")	20948810
	Hose coupling 200 (8")	20948910
	Quick coupling D=150 (6") female	20948310
	Quick coupling D=150 (6") male	20947910
	Bend 6".	20344593
	Rubber sleeve, hose clamp Ø200	20373838
	Hose suspension DN 150	20373609
	Connector 6"-5". steel.	20344353
	Junction pipe d=160	20371413
	5in Clip Grip/Bridge Hose Clamp	87000932
	6in Clip Grip/Bridge Hose Clamp	87000835
	Safety coupling Ø100 (4")	20373797
	Hose Suspension DN 125	20373608

Accessories

	Accesorio	No. De Artículo
	Hose suspension DN 100	20373607
	Safety coupling ø150 (6")	20373798

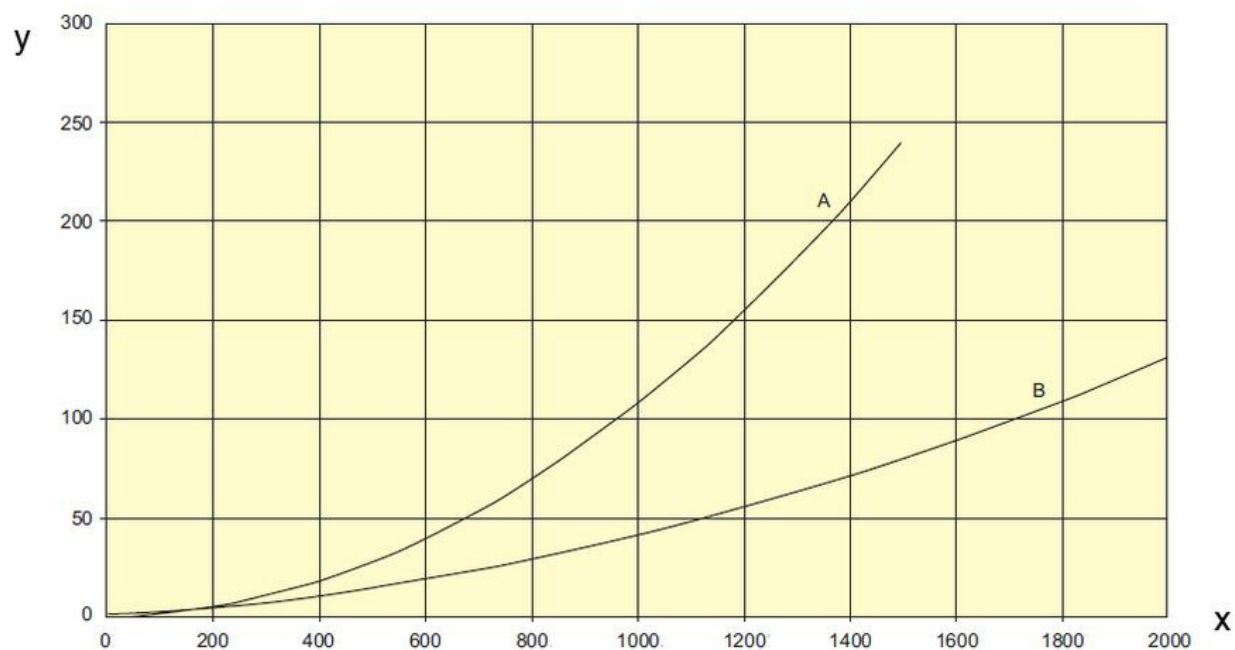

Y = Pressure drop Pa/m X = Airflow m³/h A= Ø150 mm (8") straight B= Ø200 mm (8") straight