

Product leaflet

Airflow Alarm EX

For monitoring of the set airflow in a duct



Airflow Alarm EX

- Assures optimal usage of system and secured functionality.
- Support the customer with their responsibility on air quality.
- Comply with Health and Safety legal requirements and recommendations.
- Continuous service and maintenance for prolonging system length of life.

The Airflow Alarm monitors pressure conditions in a duct. A pressure switch connected to the control box provides the signal input.

The Airflow Alarm is connected to the fan starter and automatically starts with the fan. An Alarm is trigged (Red LED light and relay terminal) when the air pressure in the duct is outside preset limits. The LED-lights are powerful enough to have good visibility at a distance. 2 independent terminals for power supply.

The pressure switch can be installed installation in ATEX zone 2 / 22, the control box shall not be installed in an ATEX zone.

The Airflow Alarm consist of control box, pressure switch, hose, inline filter, cable gland and battery.

Airflow Alarm EX


[ProductCertifications]	[ce],[ex]	
[ProductProtectionclass]	IP54 for control box, IP65 pressure switch	
[ProductInstallation]	[Indoor]	
Ambient temperature range	0 - 50 C (32 F to 122 F)	
[ProductTechnicalData]	Power supply: 85-230V AC, 50-60Hz Fuse: Max 13A Pressure switch: External contact < 100 Ohm 12 VDC out alarm: +12 VDC max 200 mA Pressure switch installation in ATEX zone 2 / 22	
[ProductDimension]	320 x 185 x 80 mm	

Models

	Item no	Weight (lbs)	[ItemCapacityAux]
49	40780439 ^[1]	3,3 + 1,5	0.40 - 4 in wg
4 9	40780441 ^[1]	3,3 + 1,5	12 - 60 in wg

^[1] Temperature range - 15 < Ta < +70 Deg. C., Input separated by double isolation, Aluminum die castinn casing, ATEX marking - II3G Ex nC IIB T6 Gc (Gas) II3D Ex tc IIIB T75°C Dc (Dust)

2025-12-04 4/5

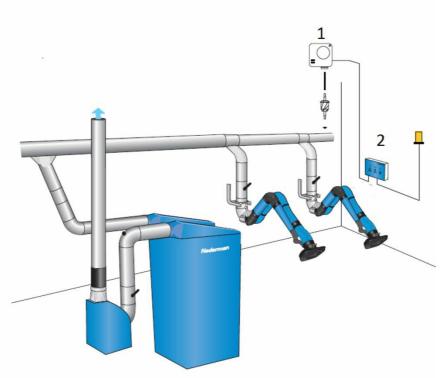

Airflow alarm and pressure switch mounted 1) Pressure switch 2) Airflow Alarm