

The best and most cost-efficient solution for extraction of hazardous airborne contaminants, in applications where small, flexible and easy-to-use arms are required.



Nederman FX2 arms are made of lightweight anodized aluminium sections, with three adjustable, composite friction joints. Offering strength and durability combined with easy handling, they can be used in many types of environment. They are especially suitable for applications where small, flexible and easy-to-use arms are required. With the profiles made of anodized aluminum with a white electrophoretic deposition coating, the arm is ideal for fume extraction in aggressive environments where corrosion resistance must be assured.

- Optimal efficiency and low noise provides safe and quiet working environment
- Ceilings, walls and floors or fixed to worktops mountings and cut2fit extension profile gives maximum installation flexibility
- The two outermost arm joints can rotate and swivel through 360°, which gives the unique maneuverability
- The lean, smooth and aesthetic design allows arms to fit in well in any environment without compromising its durability and reliability
- Highly integrated products that save customers' time and costs, as well as providing the reliability and functionality to deliver a better performance

Product name	BenchTop Extraction Arm FX2 75 CHEM
Noise level (dB(A))	58 dB(A) at 240 m3/h
Installation	[Indoor]
Material	Tubes in anodized aluminium with a white electrophoretic deposition coating. Joints in PP plastic. Duct connector in EPDM rubber. Minihood in PP plastic.
Fume temperature	max 70°C
Extraction arm diameter (mm)	75
Airflow (m³/h)	110 - 240
Colour	White





Image	Description	Arm length (m)	Weight (kg)	Model
1	FX2-CHEM-D75-L1100-Up-Low	1,1	3,2	70603144*
	FX2-CHEM-D75-L1100-Up-PLUS	1,1	4,5	70503244**
	FX2-CHEM-D75-L1100-Down-Low	1,1	3,2	70603344***
	FX2-CHEM-D75-L1100-Down- Through	1,1	2,6	70603444***
~	FX2-CHEM-D75-L1500-Up-Low	1,5	3,4	70603544*
	FX2-CHEM-D75-L1500-Up-PLUS	1,5	4,7	70503644**
	FX2-CHEM-D75-L1500-Down-Low	1,5	3,4	70603744***
	FX2-CHEM-D75-L1500-Down- Through	1,5	2,8	70603844***


<sup>\*</sup>Up-Low \*\*Up-PLUS \*\*\*Down-Low

<sup>\*\*\*\*</sup>Down-Through



	Accessory	Part No
	FX-Bracket kit-D50/75/100-L190	70501144
	FFX2-Bracket kit-D50/75/100-L500	70377042
	FX2-Wall BRKT kit-Flat-L190-White	70377043
	FX2-Wall-P BRKT kit-D50/75/100-L190	70377046
	FX2-Bench bracket kit-D50/75/100	70501444
0	FX-Classic bracket-D50/75/100	70501244
	FX-Cut2fit extension-L1100.	70501344
	FX-Cut2fit extension-L2200	70374600
(m - m)	FX-Ceiling cover plate	70502644
	FX2-Ceiling cover plate-PLUS	70377045
No.	FX-Combi hood-CHEM-D50/75/100	70500344
O'in	FX-Dome hood-CHEM-D50/75/100	70376984
	FX-Metal hood-ORIG/CHEM-D50/75/100	70500444
	FX-Flange hood-CHEM-D50/75/100	70503044
	FX2-Al duct-L1000-D75/100toD100-WHT.	70377054
	FX2-Al duct-L2000-D75/100toD100-WHT	70377055
	FX-Hose-D75-L3000-Grey	70377098
	FX-Hose-D100-L3000-Grey	70377099
6	FX2-Hose support ring-D75	70377067
6	FX2-Hose support ring-D100	70377068




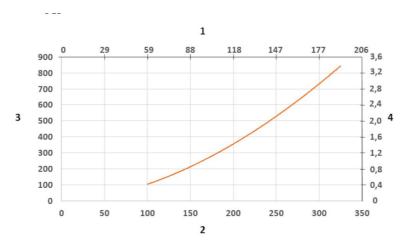

Pressure Drop diagram:

- 1) X- Axis: Air Flow Rate (cfm)
- 2) X- Axis: Air Flow Rate (m/h)
- 3) Y-Axis: Static Pressure Drop (Pa)
- 4) Y-Axis: Static Pressure Drop (in. wg.)




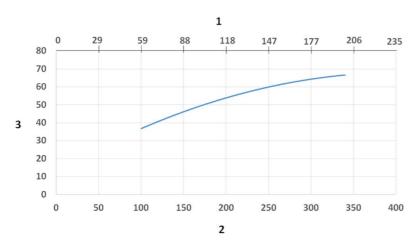

Sound Level diagram: 1) X- Axis: Air Flow Rate (cfm) 2) X- Axis: Air Flow Rate (m/h)

3) Y-Axis: Sound Pressure Level (dB) (A))



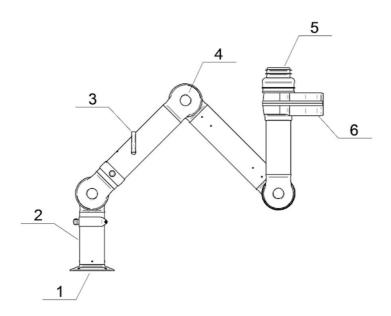

Material:

1) Flange: PP

2) Tubes: Aluminum: anodized 10  $\mu\text{m}$  , with white electrophoretic deposition coating


3) Damper adjustment handle: Aluminum: anodized 10 µm Internal spring: Staineless steel Damper blade: Conductive TP & PP plastic

4) Joints: PP with glass fibre reinforcement
Plastic rings: PP with glass fibre reinforcement
Axial locking rings: PP with glass fibre reinforcement
Adjustment knobs: PA & EDS plastic
Threaded shaft inside joints: Stainless Steel

5) Duct connector: EPDM Rubber

6) Swivel: Aluminum, powder coating Rivets: Aluminum Bearings swivel: PP with glass fibre reinforcement




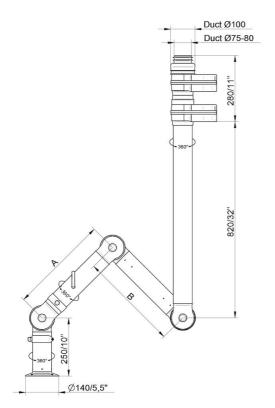

• FX2-CHEM-D75-L1100-Up-PLUS Part number: 70603244 Max. working radius: 1090 mm (42,9 in) A: 420 mm (16,5 in) B: 420 mm (16,5 in)

• FX2-CHEM-D75-L1500-Up-PLUS Part number: 70603644 Max. working radius: 1450 mm (57,1 in) A: 500 mm (19,7 in) B: 700 mm (27,5 in)




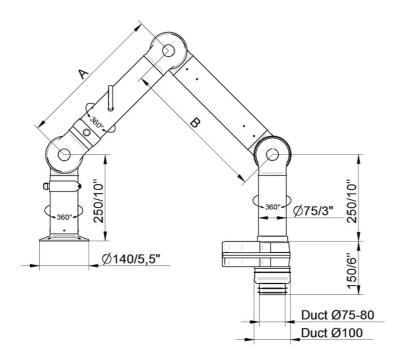

• FX2-CHEM-D75-L1100-Down-Low Part number: 70603344 Max. working radius: 1090 mm (42,9 in) A: 420 mm (16,5 in) B: 420 mm (16,5 in)

• FX2-CHEM-D75-L1500-Down-Low Part number: 70603744 Max. working radius: 1450 mm (57,1 in) A: 500 mm (19,7 in) B: 700 mm (27,5 in)




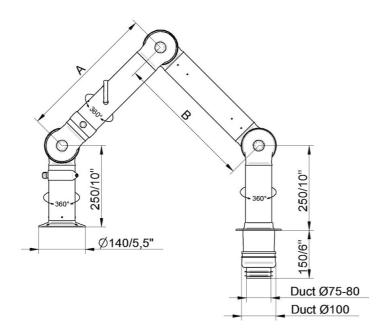

• FX2-CHEM-D75-L1100-Down-Through Part number: 70603444 Max. working radius: 1090 mm (42,9 in) A: 420 mm (16,5 in) B: 420 mm (16,5 in)

• FX2-CHEM-D75-L1500-Down-Through Part number: 70603844 Max. working radiD2:D5us: 1450 mm (57,1 in) A: 500 mm (19,7 in) B: 700 mm (27,5 in)




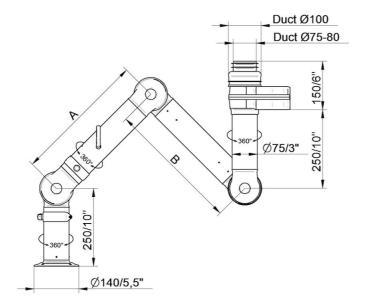

• FX2-CHEM-D75-L1100-Up-Low Part number: 70603144 Max. working radius: 1090 mm (42,9 in) A: 420 mm (16,5 in) B: 420 mm (16,5 in)

• FX2-CHEM-D75-L1500-Up-Low Part number: 70603544 Max. working radius: 1450 mm (57,1 in) A: 500 mm (19,7 in) B: 700 mm (27,5 in)



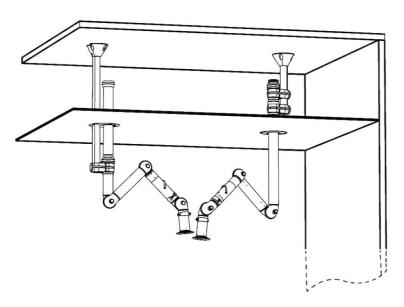

Ceiling mounting example:


Left: FX2-Up-Low arm with following accessories:

- -FX-Classic bracket
- -FX-Cut2fit extension-L1100
- -FX2-Alu duct-WHT
- -FX2-Duct connector-ORIG/CHEM-D100
- -FX-Ceiling cover plate

Right: FX2-Up-PLUS arm with following accessories:

- -FX2-Bracket kit-D-50/75/100-L500
- -FX2-Ceiling cover plate-PLUS



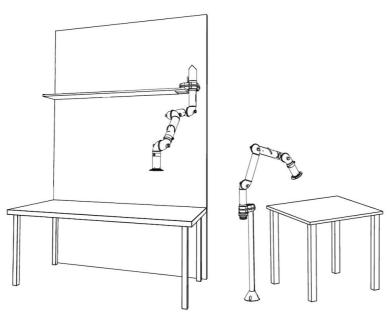

Other mounting examples:

Left: Shelf mounting with FX2-Up-Low arm and following accessories:

-EX2-Rench bracket kit


 $\label{prop:prop:prop:state} \textbf{Right: Floor mounting with FX2-Up-Low arm and following accessories:}$ 

- -FX-Classic bracket
- -FX-Cut2fit extension-L1100



22-02-2024

### BenchTop Extraction Arm FX2 75 CHEM

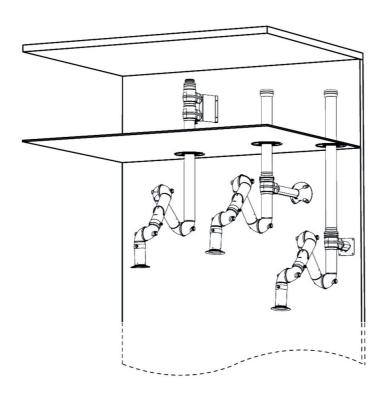

Wall mounting examples:

 $Left: {\sf FX2-Up-PLUS}\ arm\ with\ following\ accessories:$ 

- -FX2-Wall-P BRKT kit-D-50/75/100-L190
- -FX2-Ceiling cover plate-PLUS

Middle: FX2-Up-Low arm with following accessories:

- -FX2-Bracket kit-D-50/75/100-L500
- -FX2-Ceiling cover plate-PLUS
- -FX2-Alu duct-WHT
- -FX2-Duct connector-ORIG/CHEM-D100


Right: FX2-Up-Low arm with following accessories:

- -FX2-Wall BRKT kit-Flat-L190-White
- -FX2-Ceiling cover plate-PLUS
- -FX2-Alu duct-WHT
- -FX2-Duct connector-ORIG/CHEM-D100



22-02-2024

## BenchTop Extraction Arm FX2 75 CHEM

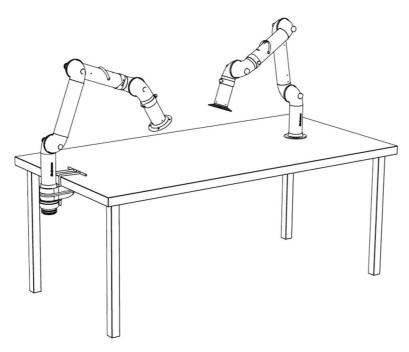

Bench mounting examples: Left: FX2-Down-Low arm with following accessories: -FX2-Bench bracket kit-D-50/75/100

Right: FX2-Down-Through arm