Nederman

FilterBox 10M

Manually cleaned for light to medium dust & fume applications.



The FilterBox 10M is equipped with a N24 fan for a maximum air flow capacity of 1 000 m3/h (600 CFM). An integrated silencer reduces noise from the fan and outlet air.

The unit has a filter supervision system which indicates when the air flow is too low. Depending on the model, it is equipped with mechanical cleaning for dust applications or a combination of mechanical and compressed air cleaning for fumes and dust. FilterBox 10M is available either as a mobile unit on wheels or attached to a floor stand. Additional protection from harmful particles is provided if a HEPA filter is installed.

For dust applications, the unit is cleaned mechanically. For welding fumes it uses a combination of mechanical and compressed air cleaning.

For welding applications, compressed air cleaning is required.

Note! FilterBox is not for use in environments where combustible dust or gases are present, and it is not for use in filtering combustible dust or gases.

- User friendly and superior filter cleaning, mechanical and/or with compressed air for long filter life
- Automatic damper preventing dust from leaking out while cleaning
- Dust free filter replacement and emptying of dust bin
- Third party approval for welding fumes category W3 according to EN 15012-1
- Approved for welding fumes category W3 according to EN 15012-1, third party tested.

Product name	FilterBox 10M		
Noise level (dB(A))	66		
Protection class	IP 54		
Filter efficiency (%)	99		
Compressed air requirement	DIN ISO 8573-1, class 5/5/4 (7 bar)		
Installation	[Indoor]		
Material	Casing in rotomoulded plastic		
Dustbin volume (I)	15		
Extraction arm diameter (mm)	160		
Airflow (m³/h)	1000		
Filter Area (m²)	13		
Frequency (Hz)	50		
Filter type	[cartridge]		
Number of filter elements	1		
Filter material	Polyester PW13		
Electric plug	[without]		
Weight (kg)	102		
Filter cleaning method	[Mechanical], [CompressedAir]		



Note

CE




[image]	Description	Power Voltage (V)	No of phases	Arm length (m)	Mounting	Power (kW)	[model]
	FilterBox 10 M	230	3	3		0,9	12652263
	FilterBox 10 M	400	3	3		0,9	12652363
	FilterBox 10 M	230	1	3		0,75	12652463
	FilterBox 10 M	400	3	Without		0,9	12684963
	FilterBox 10 M	400	3	Without		0,9	12686563



	[partno]	
0	Spotlight original, (LED) 24V, 5W	12376616*
	Handle eQ Filterbox	12376617
	Outlet with duct connection D=200mm	12376749
·	Spark protection for Original/NEX MD-hood	10551335
B	Filter-PW-FB-13	12332672
-	Filter-PW HE-FB-15	12371106
	Filter PWA-FB-15	12371412
	HEPA filter H13 10m2 Filterbox	12376615
	HEPA filter H14 10m2 Filterbox	12376756
1	Bags for Filterbox dust bin, 10pcs	12376618
	Twin Module blue	12376801
	Filter PTFE-FB-13	12377252

*Switch for light (no fan start)



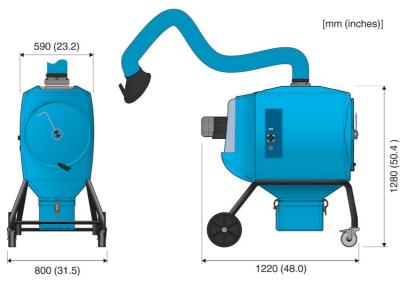

FilterBox 10A mobile