

The arm is flexible in all directions and simple to position and to extend



The Nederman Telescopic arm is specially designed for working environments with fumes, vapours or non explosive dust, where the space is limited. Typical workplaces can be welding schools or for production in small welding booths, or other industrial processes where a small, easily positioned arm is required. The reach of the arm is between 0.9 and 1.6m (3 and 5 ft).

- The arm has a balanced telescopic action by an adjustable balance block
- The product is suspended by a swivel, which allows the product to rotate 360 degrees
- The product is suspended by a swivel, which allows the product to rotate 360 degrees

Product name	Extraction Arm Telescopic
Noise level (dB(A))	76
Installation	[Indoor]
Fume temperature	Max 70° C (158 F)
Extraction arm diameter (mm)	160
Airflow (m³/h)	1000
Arm length (m)	0,9 - 1,6
Colour	Blue
Diameter, hose (mm)	






lmage	Description	Weight (kg)	Model
	Telescopic extraction arm (No hood or hose)	12	10502431
	Fume extractor arm telescopic with original hood	12	10502331
	Fume extractor arm telescopic with metal hood	12	10502531
	Fume extractor arm telescopic with metal hood with damper	12	10502731
	Telescopic exhaust system without trolley	Complete extraction unit, 37 kg (81 lbs) Rail incl sealing lips, 6.7 kg/m (5 lb/ft)	20808164



	Accessory	Part No
6	Wall bracket for extraction arm	10550635
	Wall bracket 1m	10550735
	Wall bracket 2m	10550835
CH CH	Hood. aluminium. with damper.	10321542
	Hood for telescopic arm.	10371086
and the second	Transformer 230/250 V to 24 V. 75 VA.	10361560
	Airflow indicator 500-4500 Pa	10375373
	Airflow indicator 40-600 Pa	10375374
	Spark filter for large metal hood (10321542)	10376329
	Spark filter f. round metal hoods	10373118
William Secretary Secretar	Transformer 230/250 V to 24 V. 25 VA.	10363189



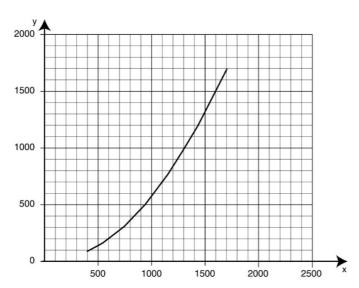

X: airflow, m³/h, Y: static pressure Pa

