

Benchtop Extraction Kits

Nederman Benchtop Extraction kits provide a quick and convenient solution for creating a fume-free workplace.









The Benchtop extraction kits includes arm(s) with hood or nozzle, Fan with speed control and standard filter (particle, HEPA or gas), hose, connection details, and table bracket. The speed of the fan is variably controlled by a speed controller. Complete with hoses and extraction hoods. The hood is made of clear plastic, which increases the visibility.






Product name	Benchtop Extraction Kits
No of phases	1
Electric plug	[us]




Benchtop Extraction Kits

[image]	Description	Power Voltage (V)	Frequency (Hz)	Weight (lbs)	Power (Hp)	[model]
	EK1000 kit includes 2 x FX32, Max airflow 42 m ³ /h	110 - 120	50 / 60	29	0.16 (0.12 Kw)	70509344
	EK1500 kit includes 3 x FX32, Max airflow 38 m ³ /h	110 - 120	50 / 60	33	0.16 (0.12 Kw)	70509244
	EK2000 kit includes 1 x FX50, Max airflow 100 m ³ /h	110 - 120	50 / 60	31	0.16 (0.12 Kw)	70508844
	EK2500 kit includes 2 x FX50, Max airflow 75 m ³ /h	110 - 120	50 / 60	37	0.16 (0.12 Kw)	70508944
	EK3000 kit includes 1 x FX75, Max airflow 150 m ³ /h	110 - 120	50 / 60	33	0.16 (0.12 Kw)	70509044
	EK500 kit includes 1 x FX32, Max airflow 45 m ³ /h	110 - 120	50 / 60	24	0.16 (0.12 Kw)	70509144
		115v	60	33	0.16	86900189
		115v	60	33	0.16	86900185
	EK2000 Extractor Kit.					86900183

Benchtop Extraction Kits

	[accessory]	[partno]
	FX-Combi hood-ORIGINAL-D50/75/100	70500144
	FX-Dome hood-ORIGINAL-D50/75/100	70376982
	FX-Metal hood-ORIG/CHEM-D50/75/100	70500444
	FX-Flange hood-ORIGINAL-D50/75/100	70502844
	N3 filter standard	70311427
	Active carbon filter 4 kg	70312427
	Pre filter EK1000-3000 1 pcs.	70333007

Benchtop Extraction Kits

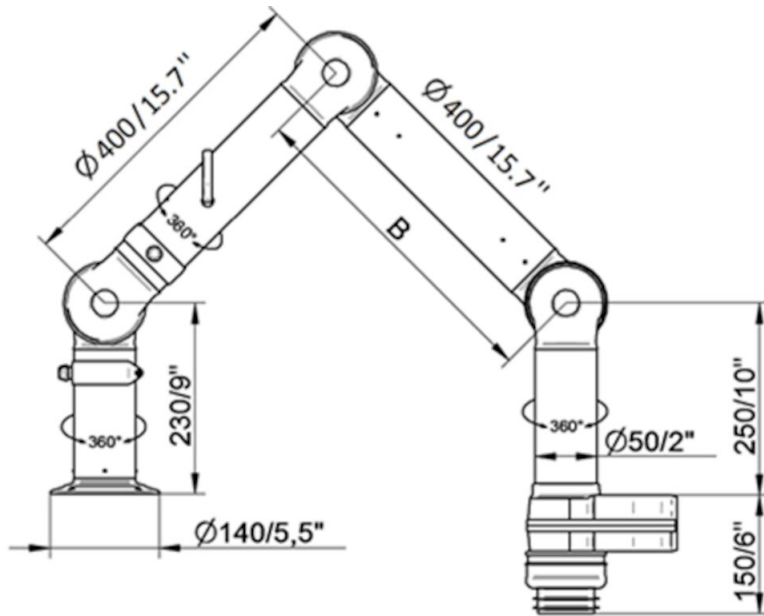

EK 2000

Arm(s): 1 x FX2 50 arm

Hood(s): 1 x combination hood

Hose: Ø 75 mm (3 inch), 3000 mm (118 inch) length

Max. airflow: 100 m³/h (58.8 cfm)

EK 2500


Arm(s): 2 x FX2 50 arm

Hood(s): 2 x mini hood

Hose: Ø 75 mm (3 inch), 3000 mm (118 inch) length


Max. airflow: 75 m³/h (44 cfm)

Benchtop Extraction Kits

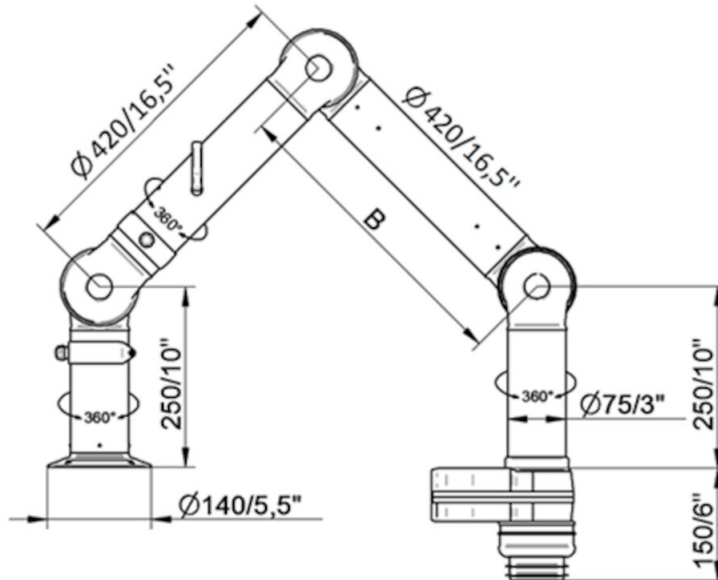

EK 3000
Arm(s): 1 x FX2.75 arm
Hood(s): 1 x mini hood
Hose: $\varnothing 100$ mm (4 inch), 3000 mm (118 inch) length
Max. airflow: 150 m³/h (88.3 cfm)

Benchtop Extraction Kits

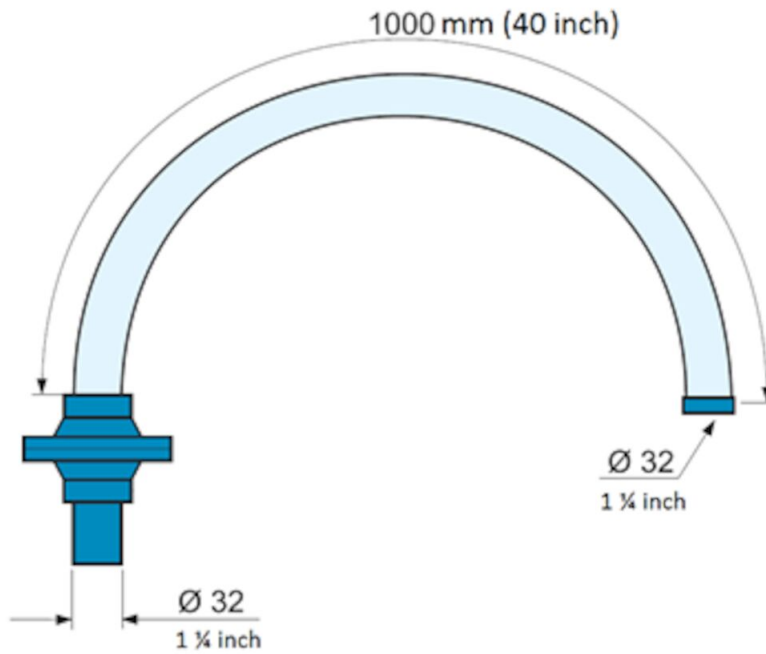

EK 500

Arm(s): 1 x FX 32 arm

Hood(s): 1 x dome hood ½

Hose: Ø 45 mm (1 ¼ inch), 3000 mm (118 inch) length

Max. airflow: 45 m³/h (26.5 cfm)

EK 1000

Arm(s): 2 x FX 32 arm

Hood(s): 2 x dome hood ½

Hose: Ø 45 mm (1 ¼ inch), 3000 mm (118 inch) length

Max. airflow: 42 m³/h (25 cfm)

EK 1500

Arm(s): 3 x FX 32 arm

Hood(s): 3 x dome hood 1/2

Hose: Ø 45 mm (1 ¼ inch), 3000 mm (118 inch) length

Max. airflow: 38 m³/h (22.4 cfm)