

A mobile welding fume collector with high capture efficiency, product quality and cost-benefit ratio



Nederman WeldFilter is a mobile welding fume extraction unit offering easy, trouble-free operation and flexible access. It captures fume near the arc or source of the fume, which is the most effective way to collect and remove fumes. WeldFilter EC 20 is available with two arms that can be swiveled 360°. The extraction arm is flexible, easy to position and are not in the way during work. There is no impact on the welding process. Capture rate is excellent. The cleanable long life cartridge filter keeps low operating costs. The cleaning is made with an included blowgun from cleaning chamber and the dust is safely disposed in dust bin.

- Includes 3 meter (10 ft.) long Extraction Arm which has unbeatable maneuverability
- Cartridge filter with high filtration efficiency and easy to replace
- · Cleanable cartridge ensures low operation cost
- Equipped with Motor overload protection device to protect people and product
- Highly efficient compact fan gives large air volume while low energy consumption

Product name	WeldFilter EC20	
Noise level (dB(A))	72	
Filter efficiency (%)	99	
Compressed air consumption	Dry and without oil, 3-4 bar	
Installation	[Indoor]	
Material	Carbon Steel	
Application	[fumes]	
Dustbin volume (I)	10	
Extraction arm diameter (mm)	160	
Airflow (m³/h)	1000 - 1800	
Filter Area (m²)	24	
Power Voltage (V)	400	
Frequency (Hz)	50	
No of phases	3	
Filter type	[cartridge]	
Number of filter elements	2	
Filter material	Polyester with PTFE lamination	
Electric plug	without	
Mounting	[mobile]	
Weight (kg)	210	
Filter cleaning method	[Mechanical]	
Power (kW)	2,2	

Fumes




Description	[model]
WeldFilter EC20	69100022



[accessory]	[partno]
Spark protection for Original/NEX MD-hood	10551335
Replacement filter, 12m² Polyester with PTFE lamination ≥ 99% efficiency for welding fume. Measured according to the test procedure in EN 15012-1.	12375379





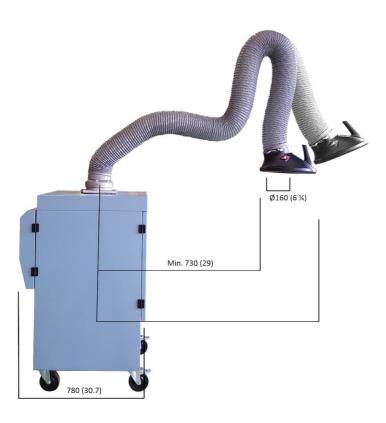



Product Dimension:

