

A self-contained downdraft table used for extraction and filtering of dust and odour.



The Nederman Filterbench Carbon range of downdraught benches are designed to control airborne particulate and odour arising from gluing, de-greasing, painting and similar applications. The FilterBench Carbon is available in three different sizes. Easy to use and always with extraction at hand. The FilterBench Carbon should not be used in an environment with danger of explosions or for dust in explosive concentrations. The FilterBench should not be used for hot or spark generating processes such as welding fumes or metal grinding.

- Easy to use and always with extraction at hand
- Pre-filter (G4) and carbon filters as standard
- Simple on/off push button control making the product easy to understand and operate
- Fan inverter included as standard making it possible to optimize air flow and minimize energy consumption
- Castors with swivel and brake included as standard making the product easy and safe to move and position

Nom du produit	FilterBench Downdraft Table with carbon filter
Efficacité de filtration (%)	99,9
Installation	Intérieur
Application	Poussière, Fumée
Longueur du bras (m)	
Tension (V)	230
Fréquence (Hz)	50
Nombre de phases	1
Média filtrant	
Prise électrique	Euro (CEE 7/2 P+E)
Mounting	Mobile
Filter cleaning method	Filtre à sens unique







Fumée




[image]	Nom de la fiche technique	Max airflow (m³/h)	Poids (kg)	Puissance (kW)	[model]
	FilterBench 23, with carbon filter	2300	230	0,5	73000119
	FilterBench 23S, with Carbon filter	2300	280	0,5	73000538
	FilterBench 46, with carbon filter	4600	340	1	73000120
	FilterBench 69, with carbon filter	6900	470	1,5	73000121



	[partno]	
MIMI	Carbon Filter 562mm x 250mm x 50mm	73000086
	Plain rubber mat 740 × 300 × 5mm	73000072
	Perforated rubber mat 740 × 770 × 5mm FB -sp	73000082
MINA	Colourcell 562mm x 250mm x 50mm	73000087
	Prefilter G4 for FilterBench	12376528



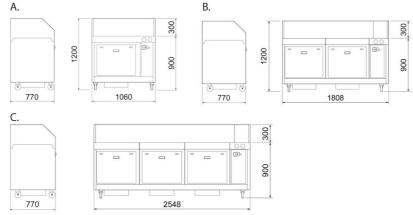

A: FilterBench 23 B: FilterBench 46 C:FilterBench 69