

Berührungsloses Abgasabsaugungssystem.

Stationäres System für Fahrzeuge mit allen
Abgasrohrtypen



Berührungsloses Abgasabsaugungssystem.

- ✓ Berührungslos - kein Abrieb
- ✓ Universal - für alle Typen von Abgasrohren
- ✓ Vielseitig - für Fahrzeuge am Boden oder in der Höhe
- ✓ Ergonomisch - einfaches Manövrieren und Bewegen zwischen den Arbeitsstationen.
- ✓ Praktisch - nicht im Weg bei Nichtgebrauch

Einfache zu handhabende Systeme für alle Wagentypen. Bestehend aus Basisschienensystem mit einer berührungsloser Absaugvorrichtung.

Sehr hohe Saugleistung. Eine Absauganlage kann mehrere Arbeitsbuchten versorgen. Transportfreundliche Absauganlagen dank leichter Werkstoffe und kugelgelagerten Rädern. Minimales Risiko der Beschädigung von Wagen. Zwei Einheiten können Wagen mit doppelten Absaugrohren versorgen.

Berührungsloses Abgasabsaugungssystem.

Zertifikat	CE
------------	----

Modelle



	Item number	Gewicht (kg)
	20808064	Complete extraction unit, 37 kg (81 lbs) Rail incl sealing lips, 6.7 kg/m (5 lb/ft)
	20808164	Complete extraction unit, 37 kg (81 lbs) Rail incl sealing lips, 6.7 kg/m (5 lb/ft)

Accessories


	Accessory	Item number
	Saug Schlitzkanal typ 920 L = 5 m	20916120
	Saug Schlitzkanal 920 L = 2,5 M (8').	20916020
	Saug Schlitzkanal TYP 920 L = 7,5m	20916220
	Saug Schlitzkanal TYP 920 L=10m	20916320
	Saug Schlitzkanal 920 L = 12,5m	20916420
	Saug Schlitzkanal TYP 920 L=15m	20916520
	Saug Schlitzkanal Typ 920 L=17,5m	20916620
	SAUGSCHLITZKANAL TYP 920 L = 20m	20916720
	Saug Schlitzkanal Typ 920 L=22,5m	20916820
	Saug Schlitzkanal typ 920 L = 25 m	20916920
	Saug Schlitzkanal typ 920 L = 27,5 m	20917020
	Saug Schlitzkanal typ 920 L = 30 m	20917120
	Saug Schlitzkanal typ 920 L = 32,5 m	20918220

Accessories



	Accessory	Item number
	Saugschlitzkanal typ 920 L = 35 m	20917220
	Saugschlitzkanal Typ 920. L = 40m	20917320
	Saugschlitzkanal typ 920 L = 45 m	20917420
	Saugschlitzkanal typ 920 L = 50 m	20917520
	Rohranschluss oben, Ø200 für 920	20374246

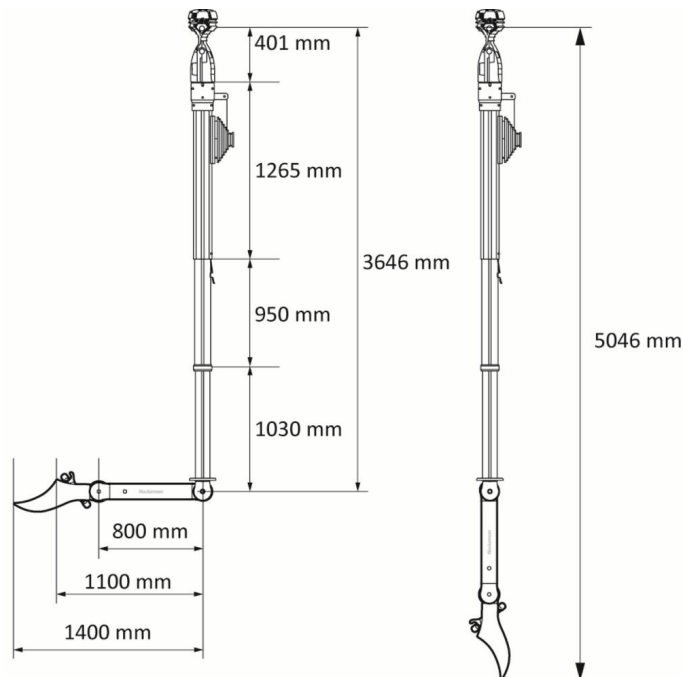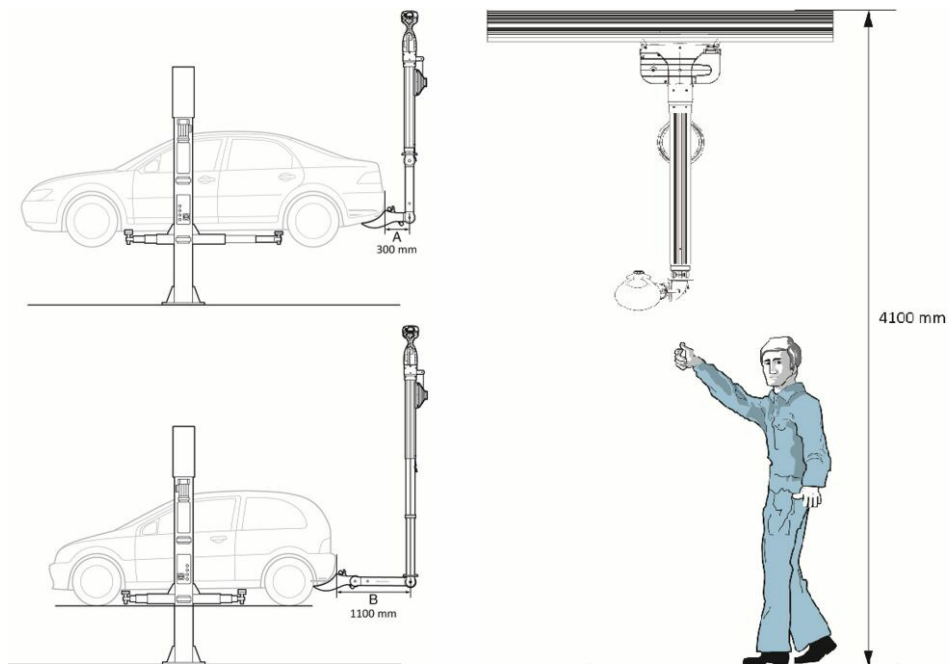

A = 300mm (The distance from the center of the rail to the back end of the longest car to be used) B = 1100mm (The distance from the center of the rail to the back end of the shortest car to be used)

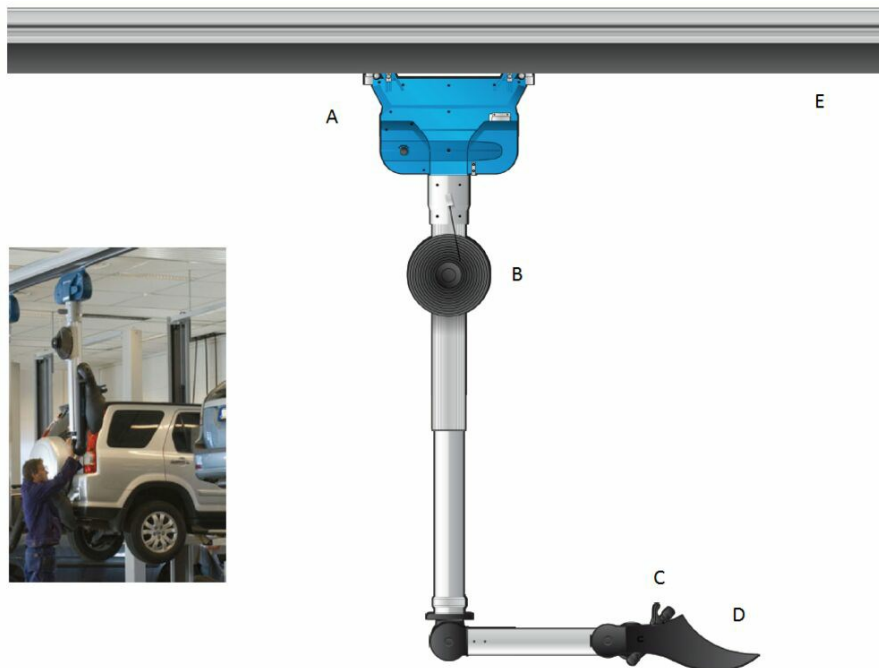

System parts A = Automatic damper integrated in trolley 1500, closes when unit is in parking position B = Balancer, Makes the Telescopic tube weightless when adjusting length of the Telescope C = Joint release button For easy and secure positioning D = Exhaust hood E = Rail 920

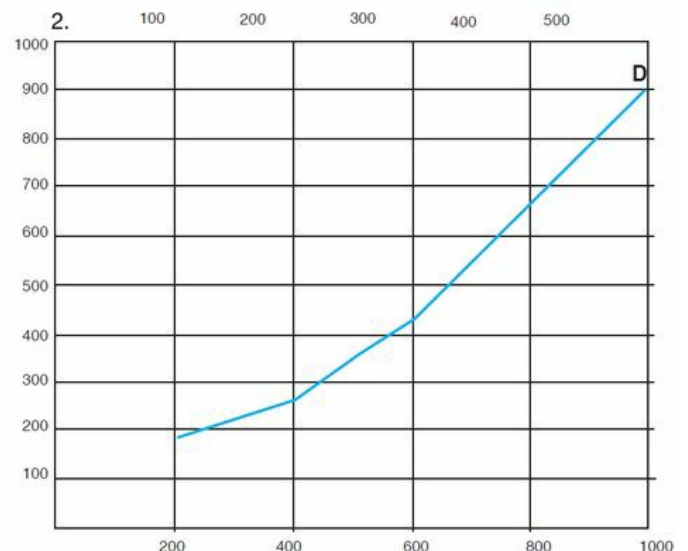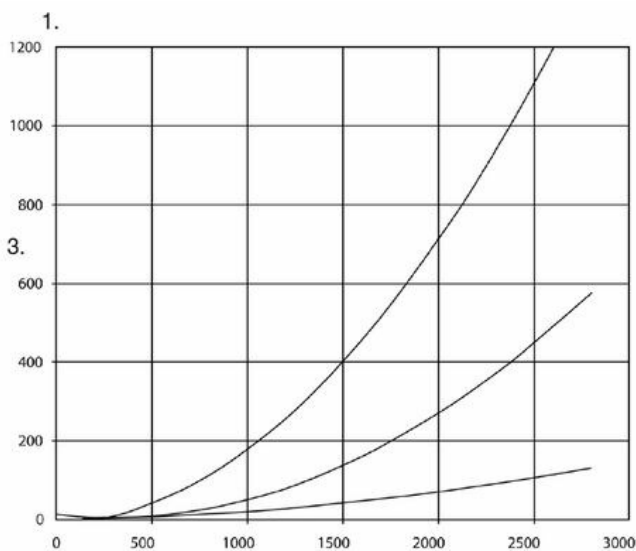

3: Pressure drop Pa, 4: Airflow m³/h A= Top connection, Ø200 mm, B= Side connection, Ø160 mm, C= Rail 920, per metre, D= Touchless extraction unit including trolley Pressure drop approximately 55% less than corresponding system with hose. Airflow recommendations Car: 600 m³/h (350 cfm)