

Contactloos uitlaatafzuigstelsiem

Stationair stelsiem voor auto's met alle soorten uitlaatpijpen



Contactloos uitlaatafzuigstelsiem

- ✓ Contactloos – zonder schrapen
- ✓ Universeel – voor alle soorten uitlaatpijpen
- ✓ Veelzijdig – voor auto's op de grond of opgetild
- ✓ Ergonomisch – gemakkelijk te manoeuvreren en te verplaatsen tussen werkstations
- ✓ Praktisch – niet in de weg bij niet in gebruik zijn

Gemakkelijk te hanteren stelsiem voor alle soorten auto's. Bestaat uit een basis railsysteem dat wordt aangevuld met een contactvrije afzuigunit. Zeer hoge afzuig-efficiëntie. Een afzuigapparaat kan dienen voor meerdere werkstations. Afzuigunits zijn gemakkelijk te verplaatsen, dankzij het lichtgewicht materiaal en wielen met kogellagers. Ontworpen om het risico van het beschadigen van de auto te voorkomen. Twee apparaten bedienen auto's met dubbele uitlaatpijpen.

Contactloos uitlaatafzuigstelsiem

Certificeringen	CE
-----------------	----

Models



	Item number	Gewicht (kg)
	20808064	Complete extraction unit, 37 kg (81 lbs) Rail incl sealing lips, 6.7 kg/m (5 lb/ft)
	20808164	Complete extraction unit, 37 kg (81 lbs) Rail incl sealing lips, 6.7 kg/m (5 lb/ft)

Accessories


	Accessory	Item number
	Exhaust rail 920 L= 5.0 M (17')	20916120
	Exhaust rail 920 L= 2.5 M (8')	20916020
	Exhaust rail 920 L= 7.5 M (25')	20916220
	Exhaust rail 920 L= 10.0 M (33')	20916320
	Exhaust rail 920 L= 12.5 M (41')	20916420
	Exhaust rail 920 L= 15.0 M (50')	20916520
	Exhaust rail 920 L= 17.5 M (57')	20916620
	Exhaust rail 920 L= 20.0 M (66')	20916720
	Exhaust rail 920 L= 22.5 M (74')	20916820
	Exhaust rail 920 L= 25.0 M (82')	20916920
	Exhaust rail 920 L= 27.5 M (90')	20917020
	Exhaust rail 920 L= 30.0 M (99')	20917120
	Exhaust rail 920 L= 32,5m	20918220

Accessories



	Accessory	Item number
	Exhaust rail 920 L= 35.0M (115')	20917220
	Exhaust rail 920 L= 40,0 m (132')	20917320
	Exhaust rail 920 L= 45,0 m (148')	20917420
	Exhaust rail 920 L= 50,0 m (165')	20917520
	Top outlet Ø200 for 920	20374246

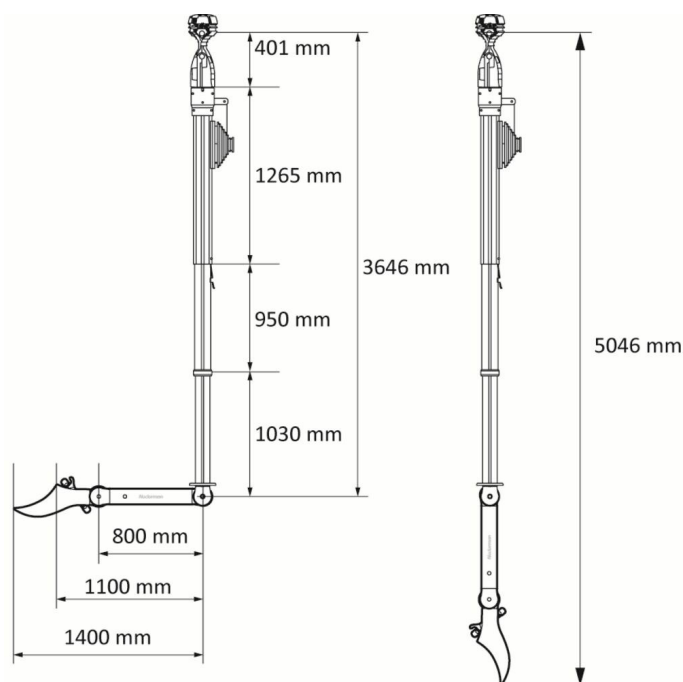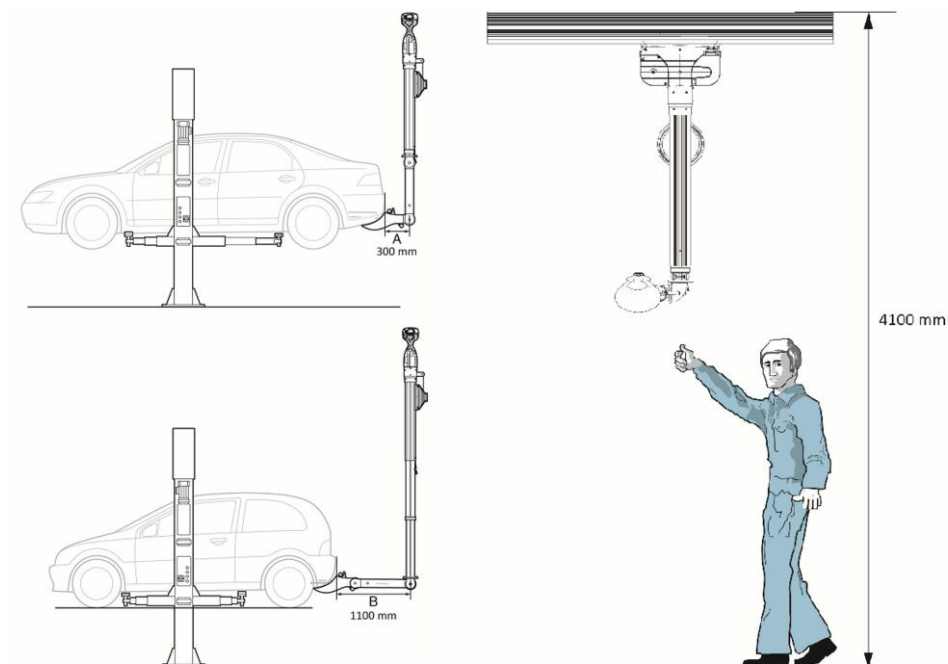

A = 300mm (The distance from the center of the rail to the back end of the longest car to be used) B = 1100mm (The distance from the center of the rail to the back end of the shortest car to be used)

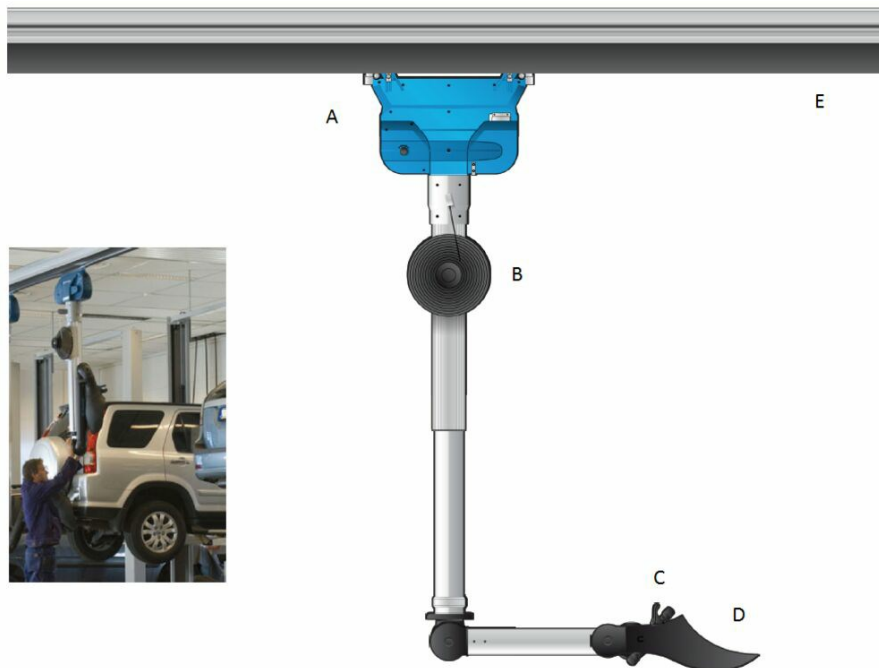

System parts A = Automatic damper integrated in trolley 1500, closes when unit is in parking position B = Balancer, Makes the Telescopic tube weightless when adjusting length of the Telescope C = Joint release button For easy and secure positioning D = Exhaust hood E = Rail 920

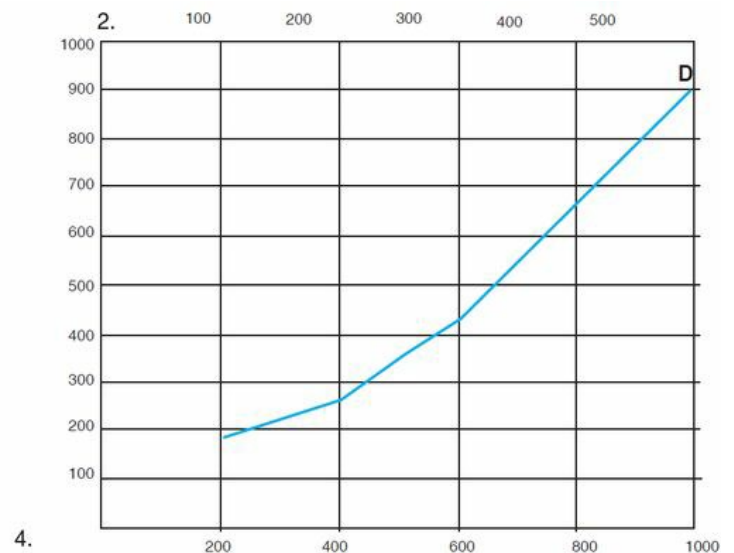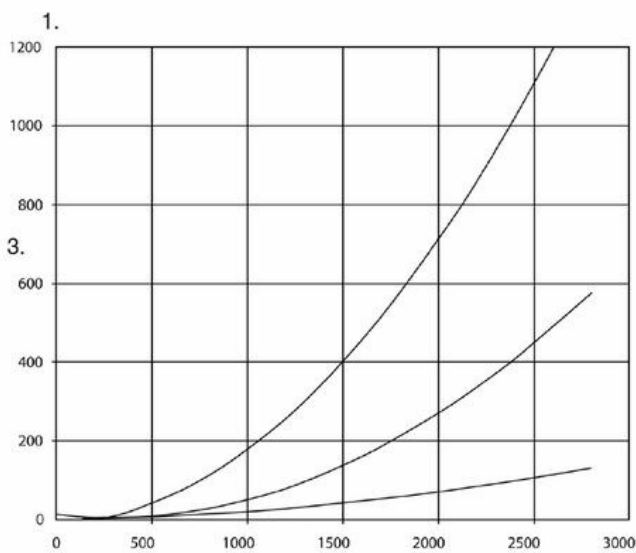

1: Rail 920 pressure drop, 2: Pressure drop Telescope including trolley, 3: Pressure drop Pa, 4: Airflow m³/h A= Top connection, Ø200 mm, B= Side connection, Ø160 mm, C= Rail 920, per metre, D= Touchless extraction unit including trolley Pressure drop approximately 55% less than corresponding system with hose. Airflow recommendations Car: 600 m³/h (350 cfm)